

BC36/BC36(i) Circulating and BR36/BR36(i) Radiant Wood Burning Fireplaces



FIREBOX DIMENSIONS

Front opening width: 36"

Front opening height: 21"

TECHNICAL INFORMATION

Flue Series (Std.): "SK8" Double Wall

Flue Size: 8" Inner; 11" Outer

Clearance to Chimney Pipe: 1-1/2"

Firestop Framing: 14-1/2" x 14-1/2"

Minimum Flue Height: 12' 6"

Maximum Flue Height: 90'

Minimum Height with 2 Elbows: 14' 6"

Minimum Height with 4 Elbows: 21'

Clearance to Fireplace: 1/2" to sides and back

Minimum Hearth Extension Size: 16" x 48"

UL/ULC Design Certified

FIELD INSTALLED ACCESSORIES

Bi-fold Glass Doors: Brushed Brass, Black, Polished Brass, Pewter





EB1: Electrical Junction Box (BC36/BC36i only)

SCVS: Variable Speed Control for Fan (BC36/BC36i only)

Fan Kit: FK12 (BC36/BC36i only)

Outside Air Kit: AK-MST

Terminations (Std.): "SK8" Series RLTSK8, RLTSK8L, PLTSK8, SLTSK8

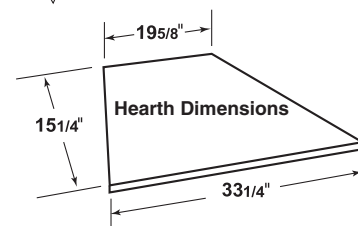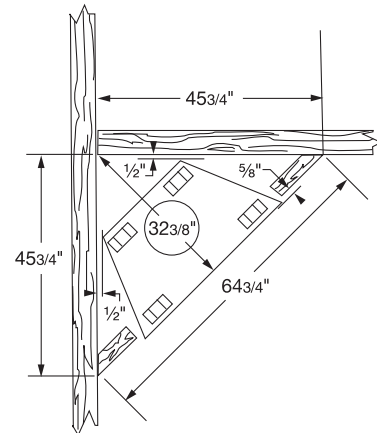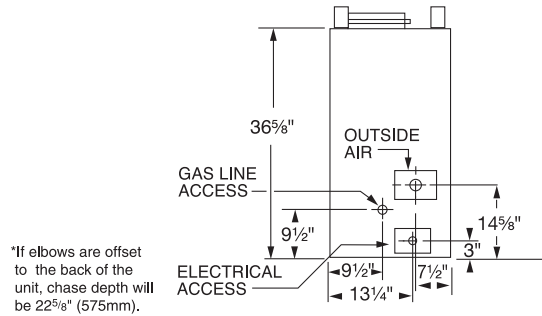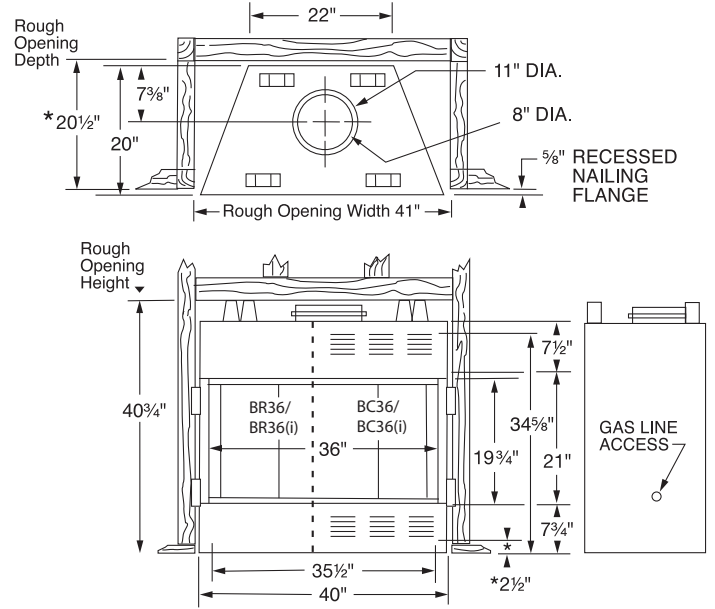

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.majesticproducts.com

